

1/20

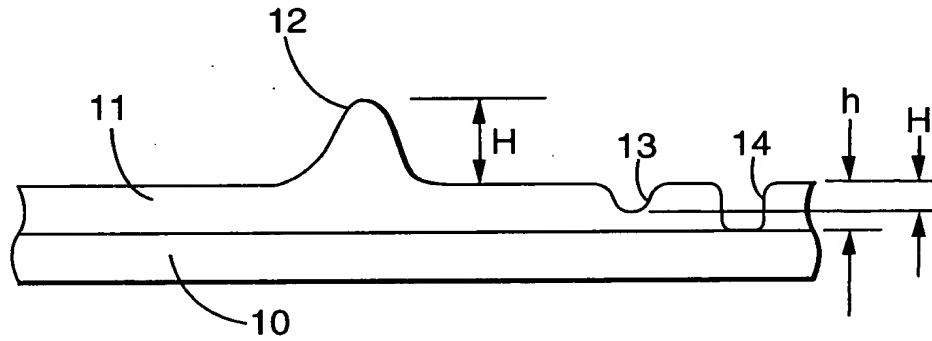


FIG. 1

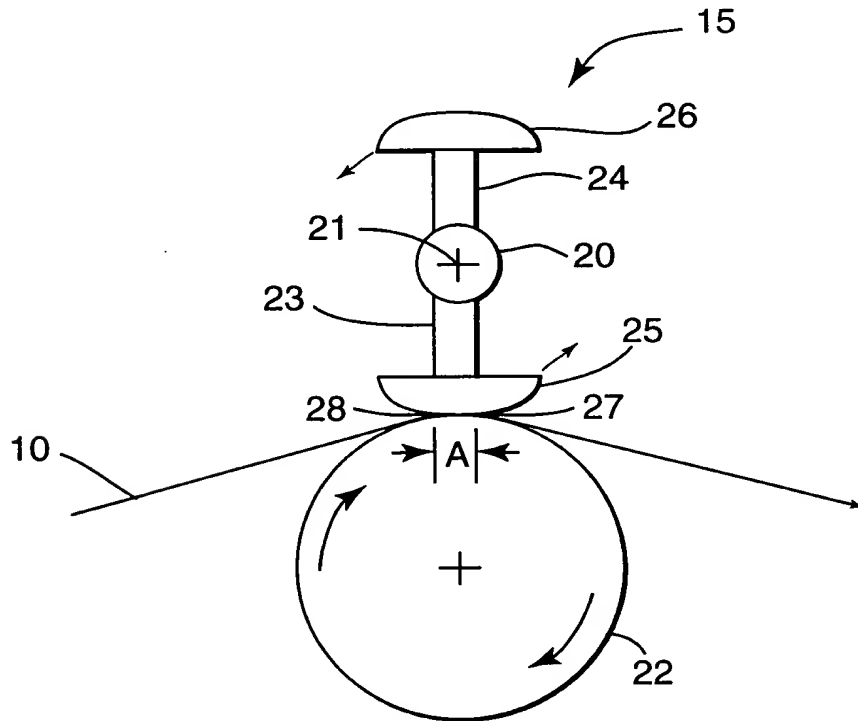


FIG. 2

09757955-01001

2/20

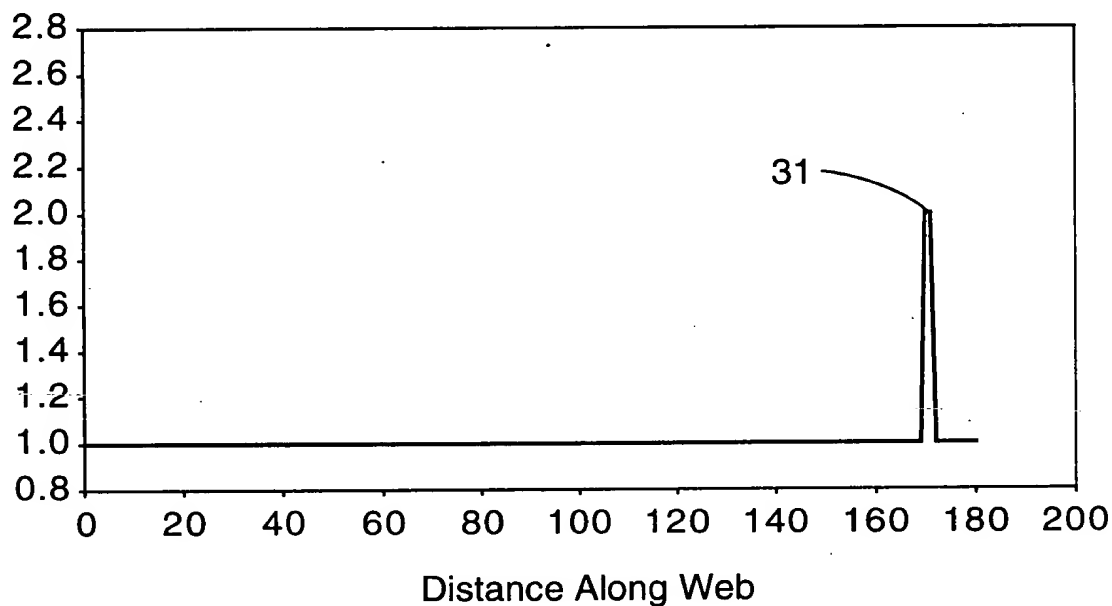


FIG. 3

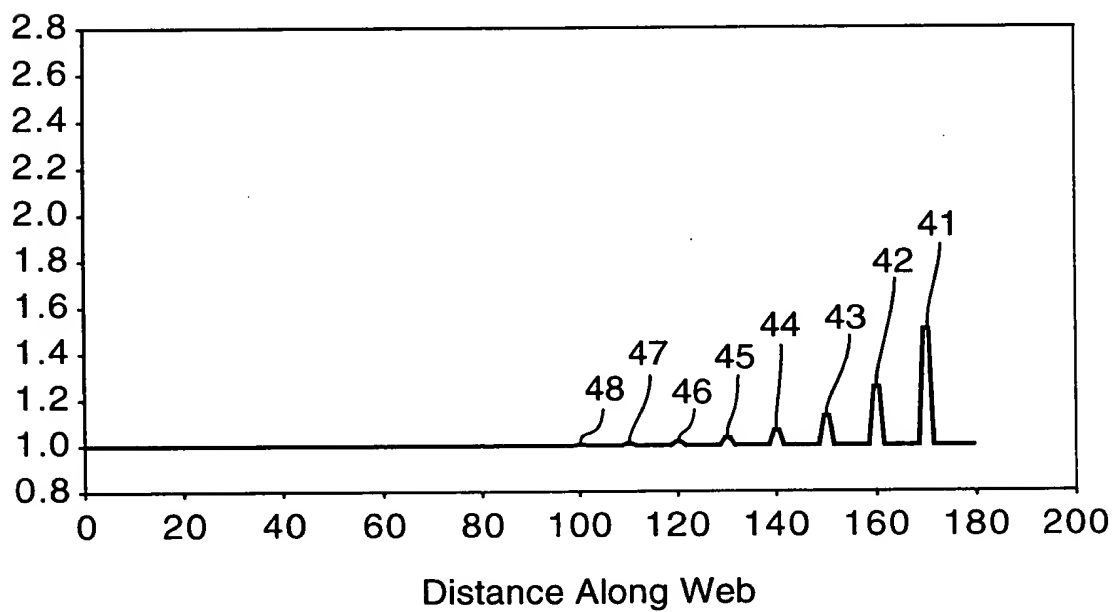


FIG. 4

FIG. 3

APPROVED	O.G. FIG.
BY	CLASS
DRAFTSMAN	CLASS

COATING DEVICE AND METHOD
William Leonard, et al.
55476 A.002

3/20

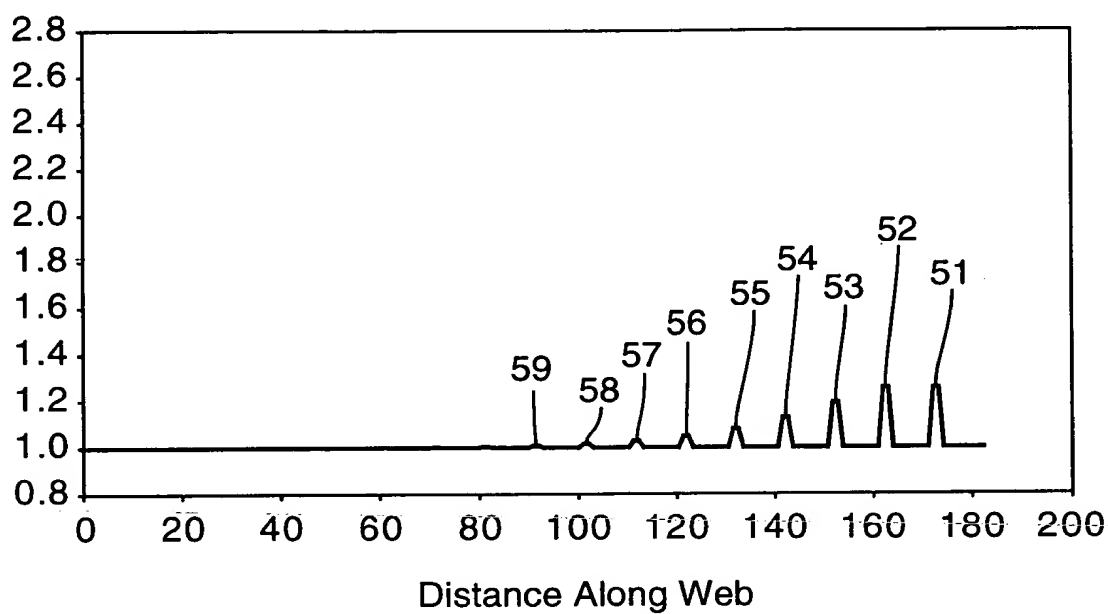


FIG. 5

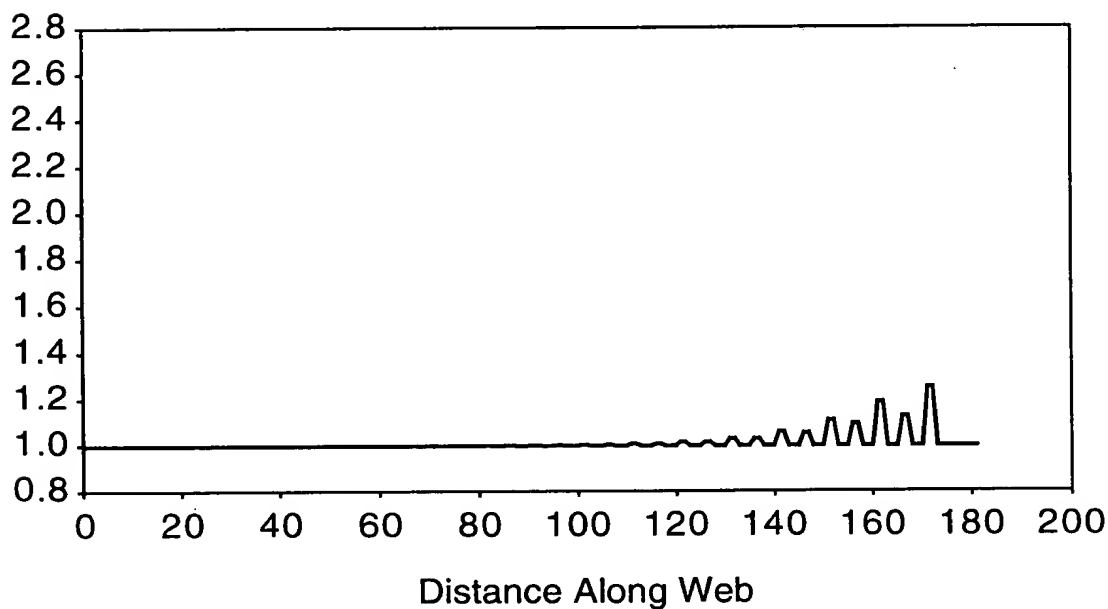


FIG. 6

09757955-011001

APPROVED	O.G. FILE	
BY	CLASS	BCCLASS
DRAFTSMAN		

COATING DEVICE AND METHOD
 William K. Leonard, et al.
 USA2A.002

4/20

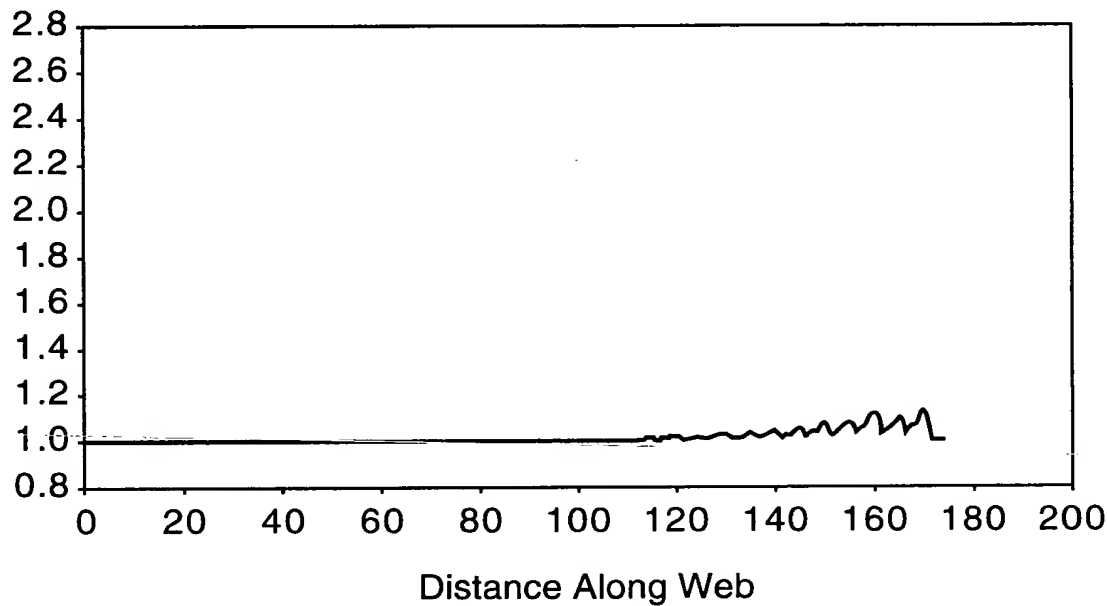


FIG. 7

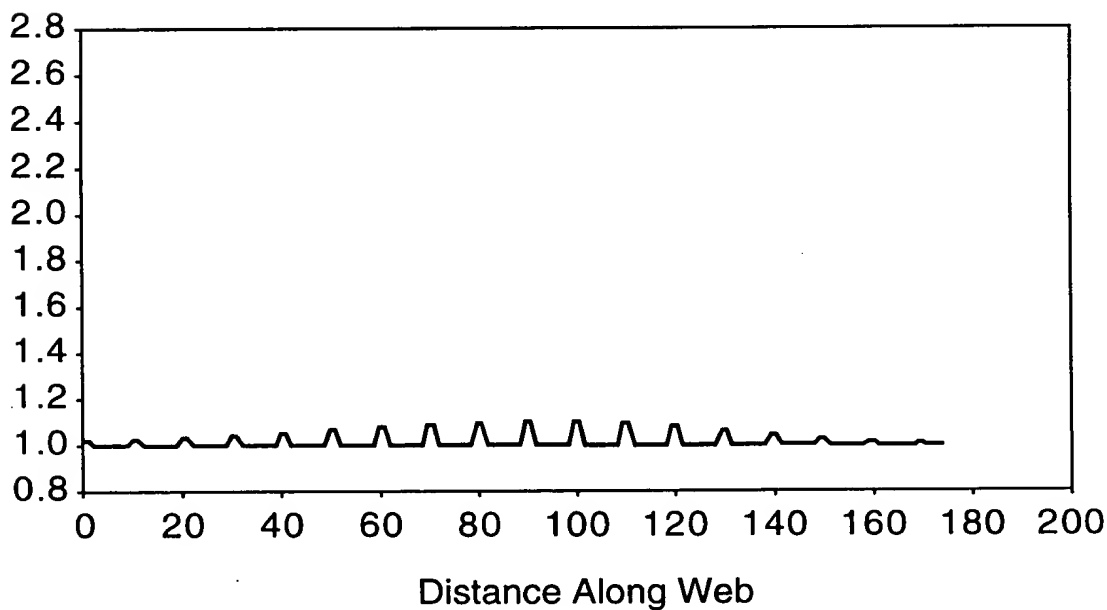


FIG. 8

09757955-011001
 FOOTED 95625260

APPROVED	FILE
BY	CLASS
DRAWN	CLASS

COATING DEVICE AND METHOD
William Leonard, et al.
5547 A2A.002

5/20

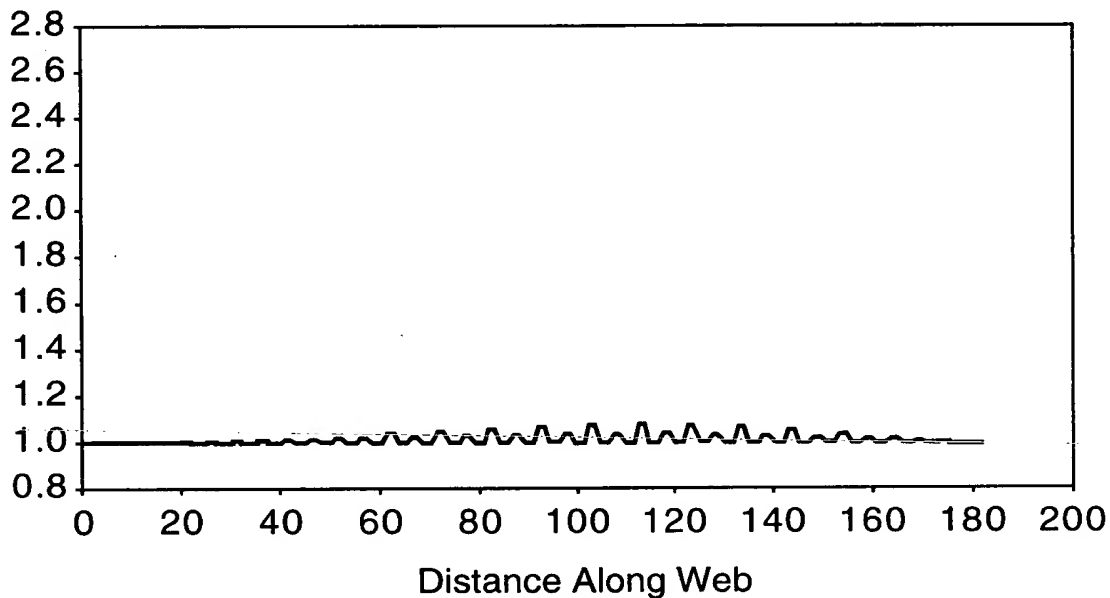


FIG. 9

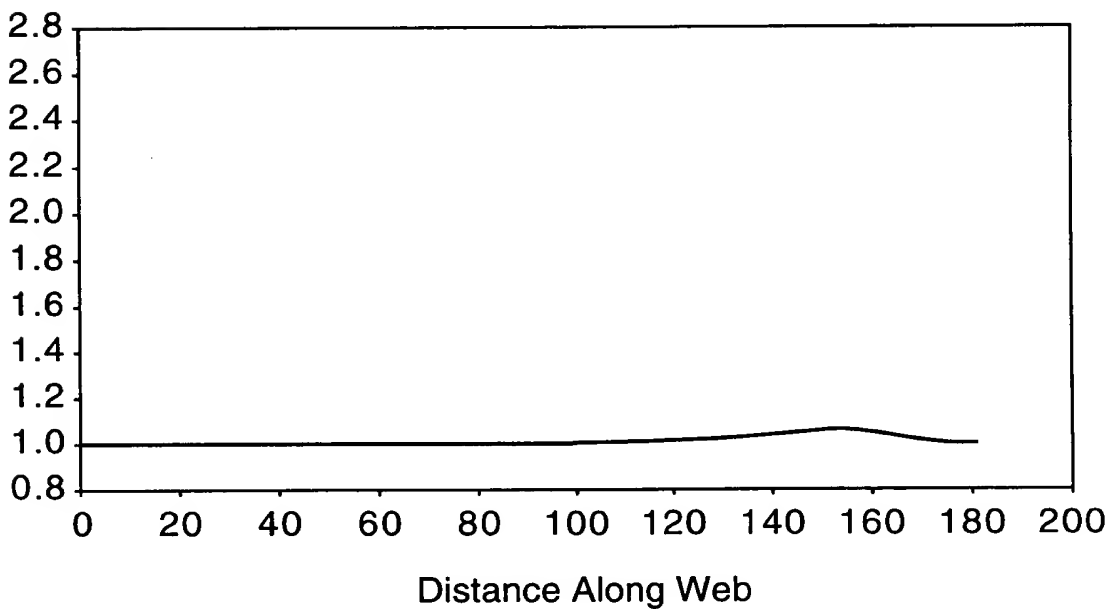


FIG. 10

09757955-011001

6/20

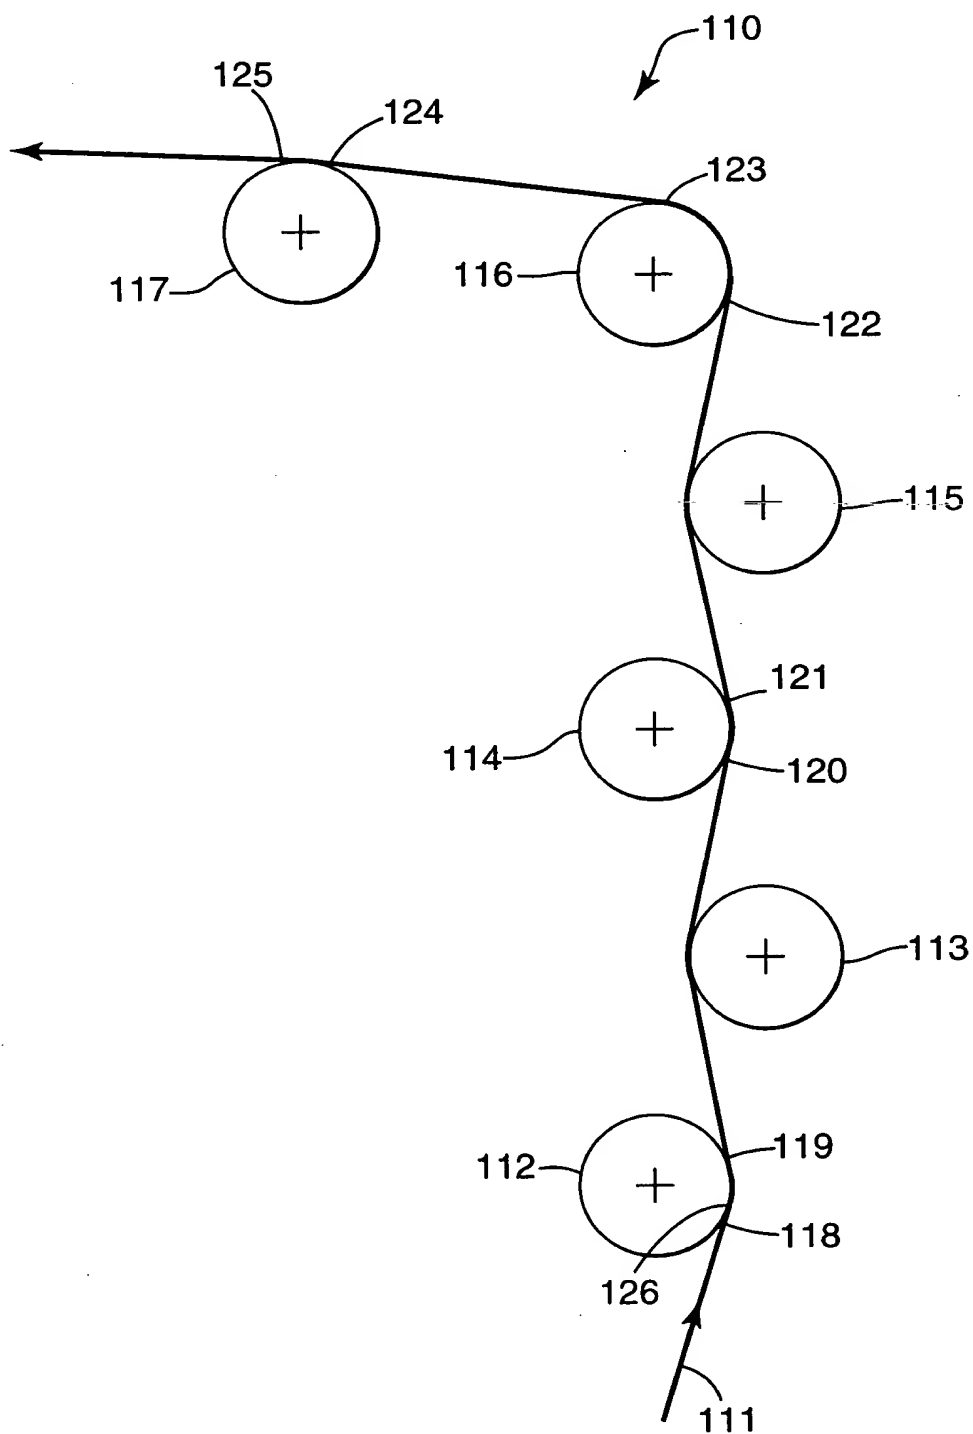


FIG. 11

APPROVED	BY	CLASS	JOBCLASS
DRAFTSMAN			

COATING DEVICE AND METHOD
 Von K. Leonard, et al.
 USA2A.002

7/20

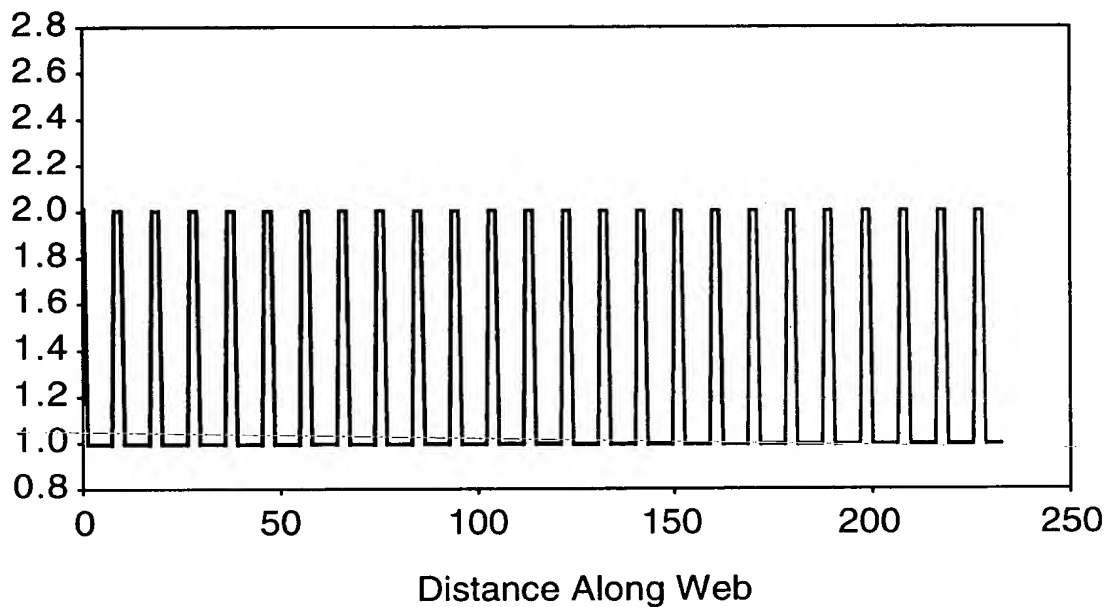


FIG. 12

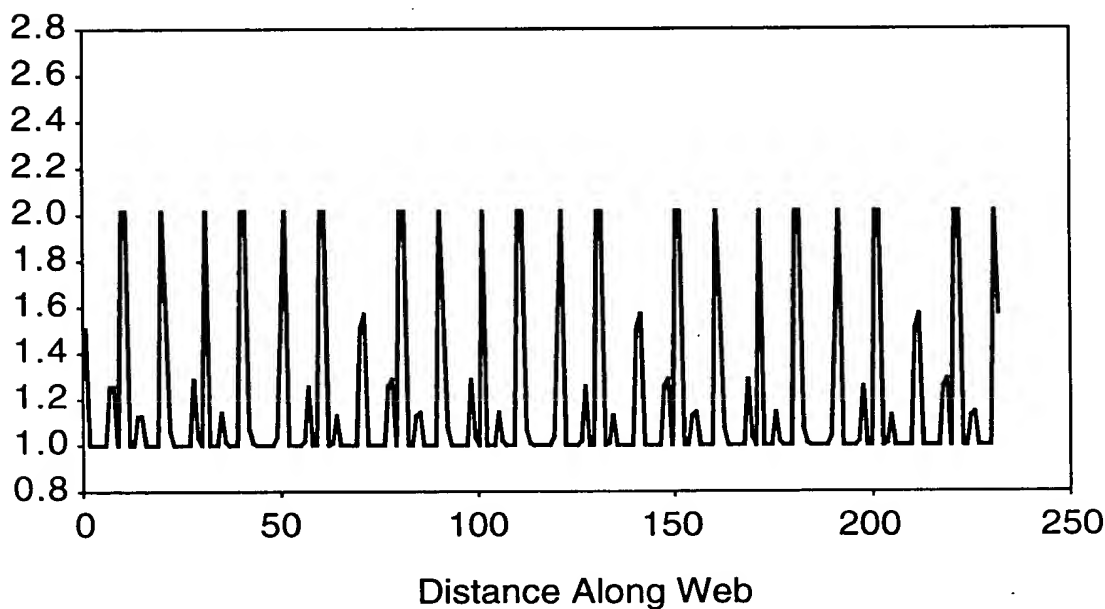


FIG. 13

09757955-011001

APPROVED	O.G. 100
BY	CLASS 100 CLASS
DRAFTSMAN	

COATING DEVICE AND METHOD
 William Leonard, et al.
 5547 A2A.002

8/20

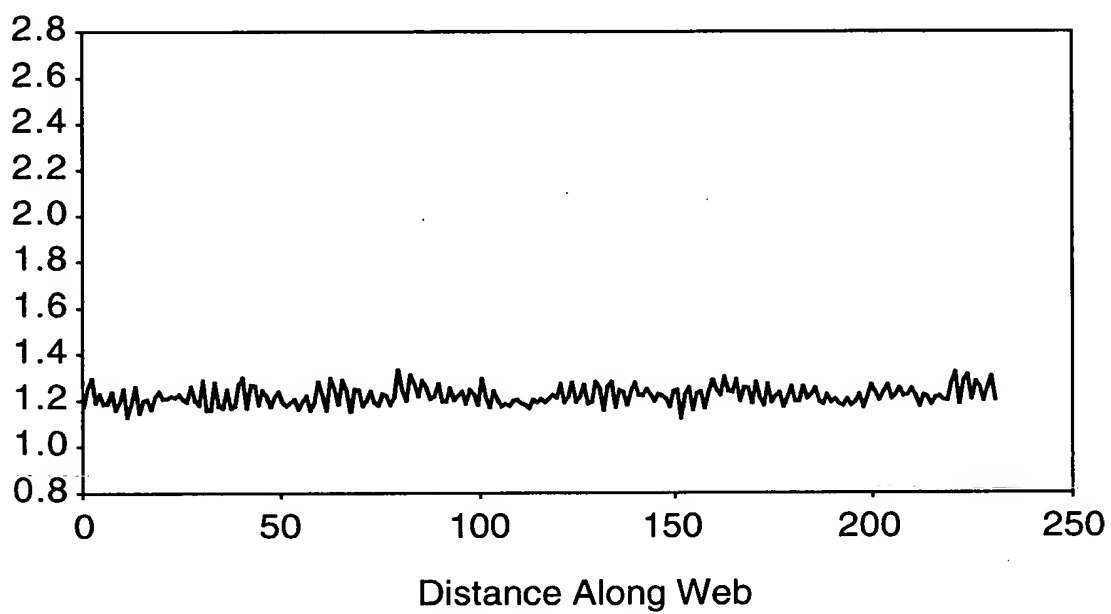


FIG. 14

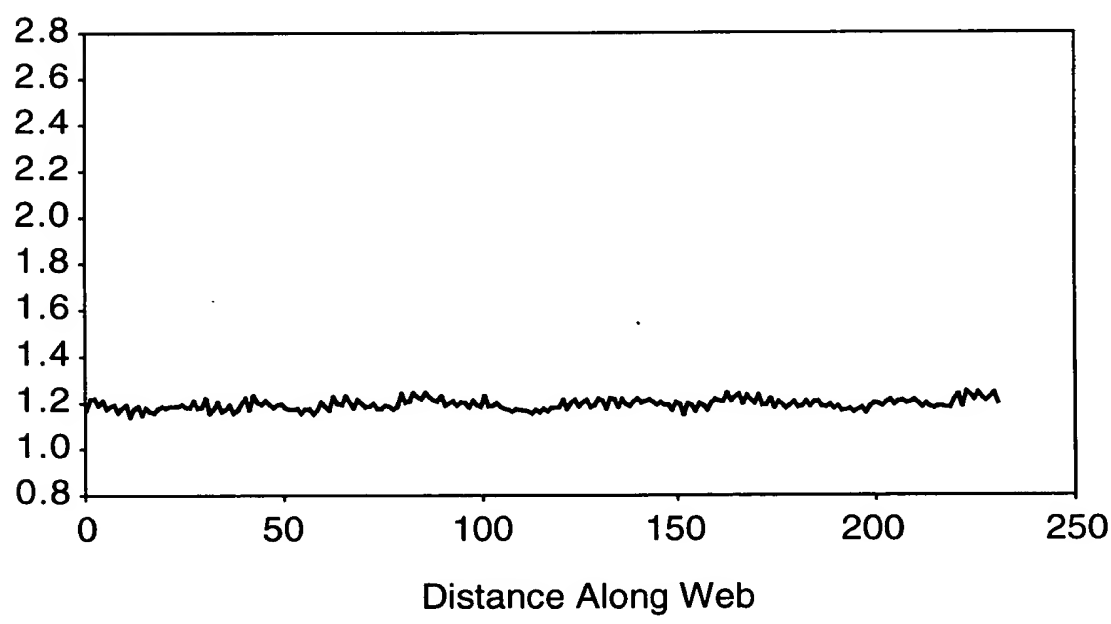


FIG. 15

09/5/95 10:10:01

APPROVED	O.G.
BY	CLASS
DRAFTSMAN	

COATING DEVICE AND METHOD
 William Leonard, et al.
 5547 2A.002

9/20

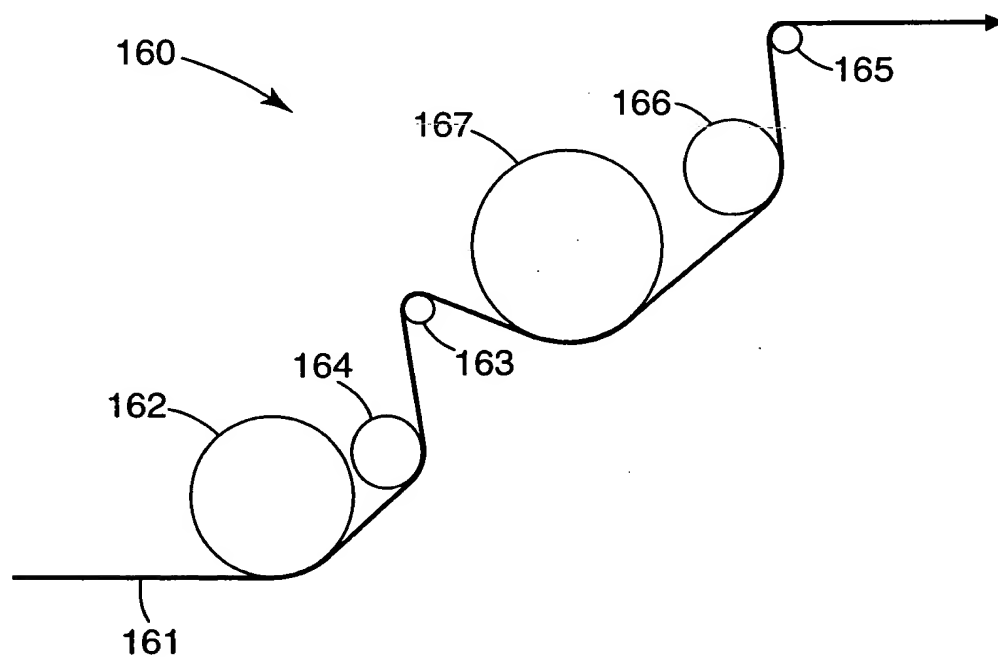


FIG. 16

09/25/95 01:00
 T00110 55645260

10/20

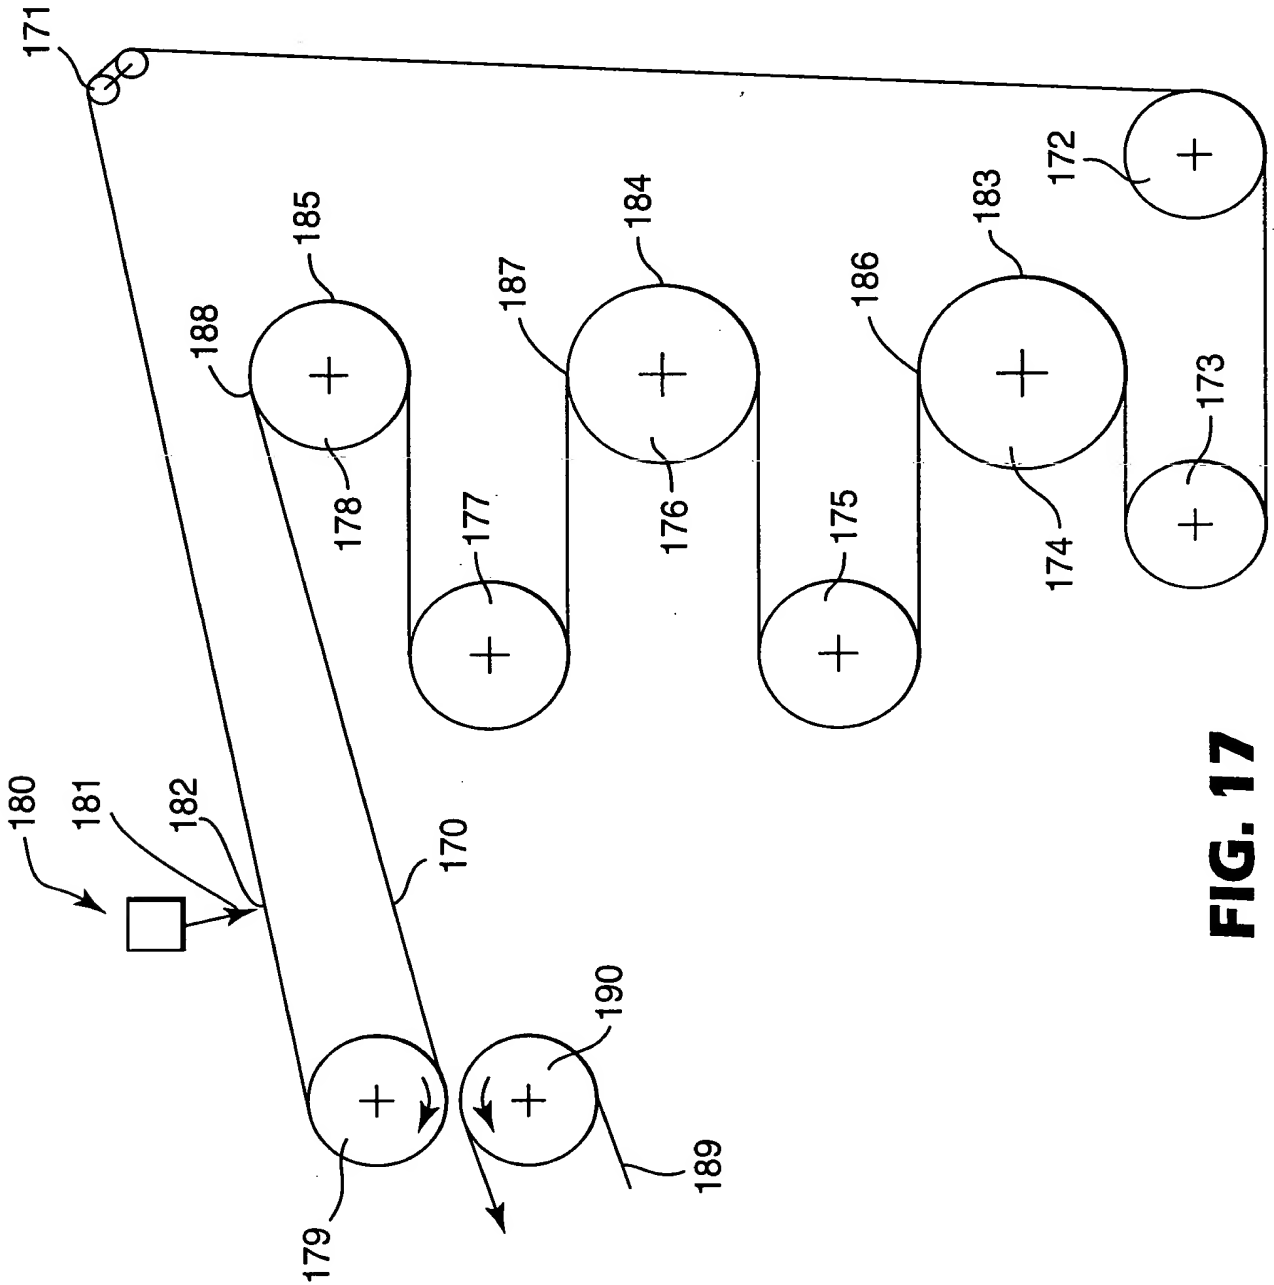


FIG. 17

FIG. 17

FIG. 18

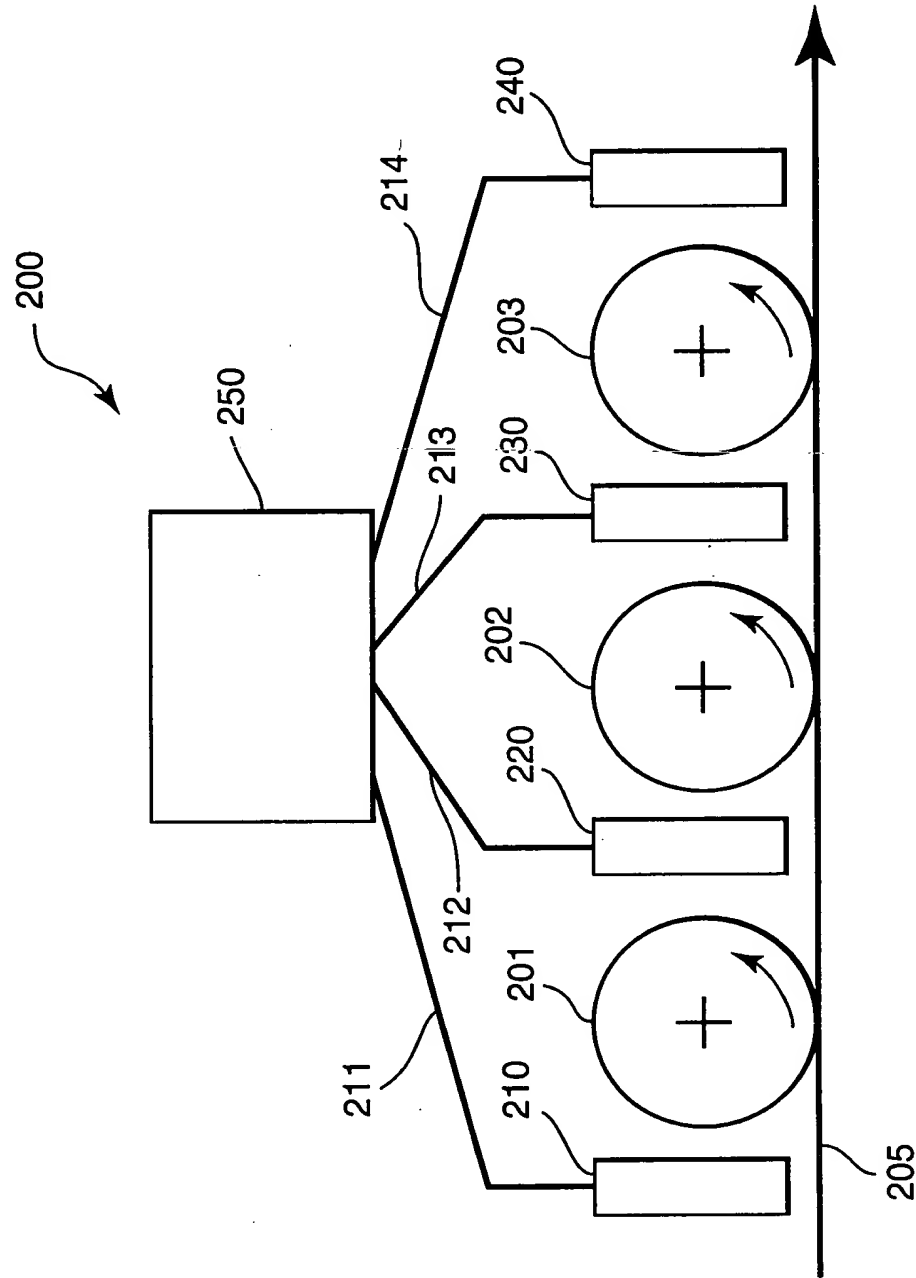


FIG. 18

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

COATING DEVICE AND METHOD
 William Leonard, et al.
 554762 A.002

12/20

Dim. Min.
Caliper

- 0.27-0.3
- 0.24-0.27
- 0.21-0.24
- 0.18-0.21
- 0.15-0.18
- 0.12-0.15
- 0.09-0.12
- 0.06-0.09
- 0.03-0.06
- 0-0.03

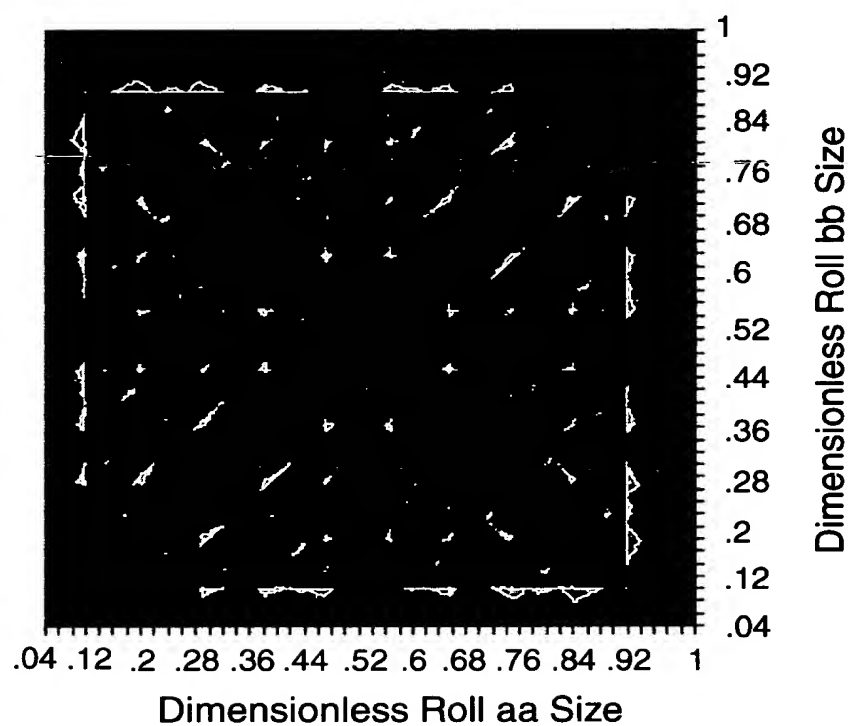


FIG.19

BY	U.G. FIG	
DRAFTSMAN	CLASS	SUECLASS

FIG. 20

Dim. Min.
Caliper

- 0.63-0.7
- 0.56-0.63
- 0.49-0.56
- 0.42-0.49
- 0.35-0.42
- 0.28-0.35
- 0.21-0.28
- 0.14-0.21
- 0.07-0.14
- 0-0.07

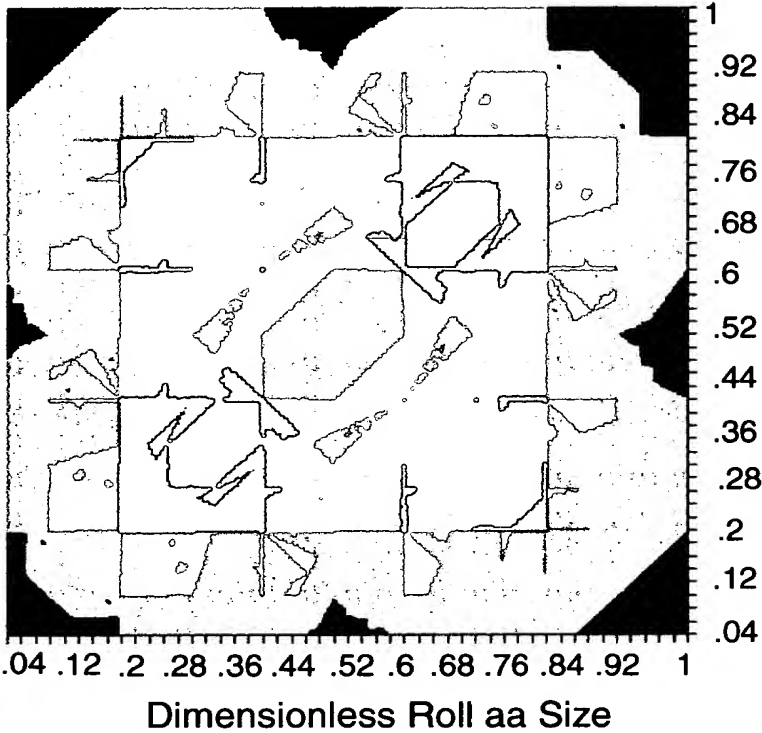


FIG. 20

BY	CLASS		SUBCLASS
DRAFTSMAN			

COATING DEVICE AND METHOD
 William Leonard, et al.
 5547682A.002

14/20

FIG. 21

**Dim. Min.
Caliper**

- 0.774-0.86
- 0.688-0.774
- 0.602-0.688
- 0.516-0.602
- 0.43-0.516
- 0.344-0.43
- 0.258-0.344
- 0.172-0.258
- 0.086-0.172
- 0-0.086

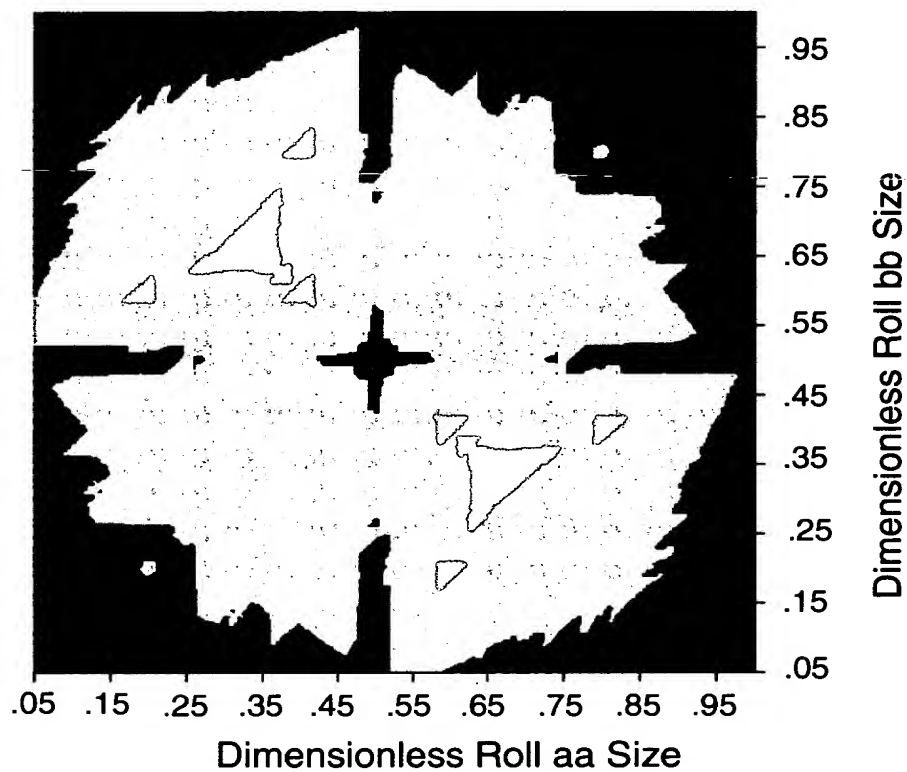


FIG. 21

15/20

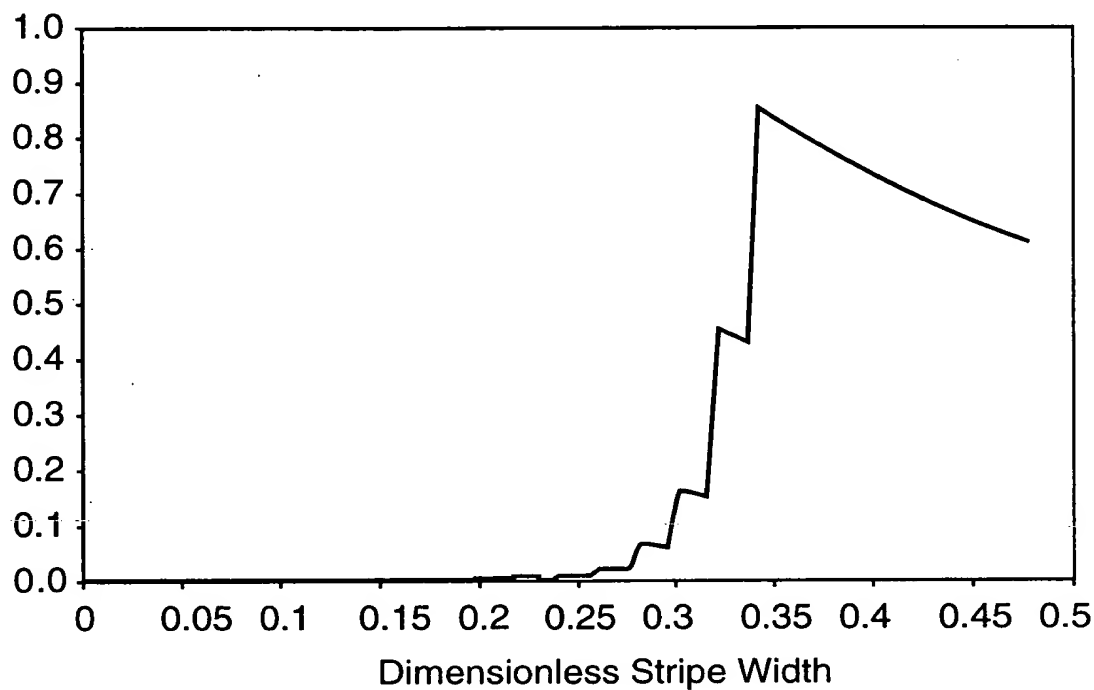


FIG. 22

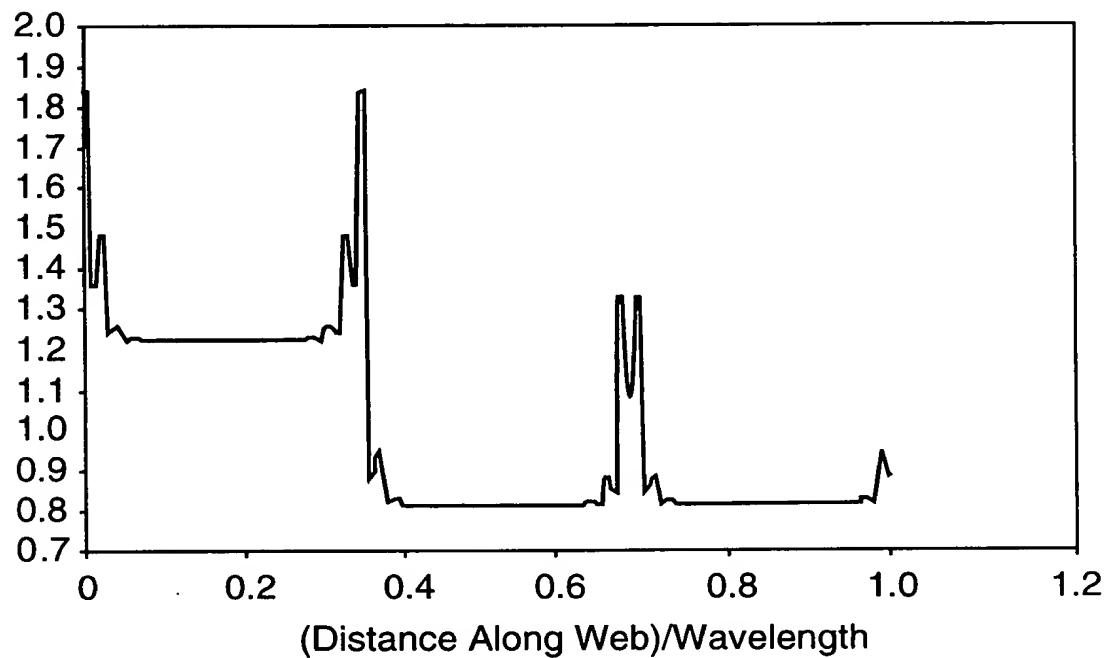


FIG. 23

09757955 041001

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

COATING DEVICE AND METHOD
William Leonard, et al.
5547612A.002

16/20

FIG. 24

Dim. Min.
Caliper

- 0.315-0.35
- 0.28-0.315
- 0.245-0.28
- 0.21-0.245
- 0.175-0.21
- 0.14-0.175
- 0.105-0.14
- 0.07-0.105
- 0.035-0.07
- 0-0.035

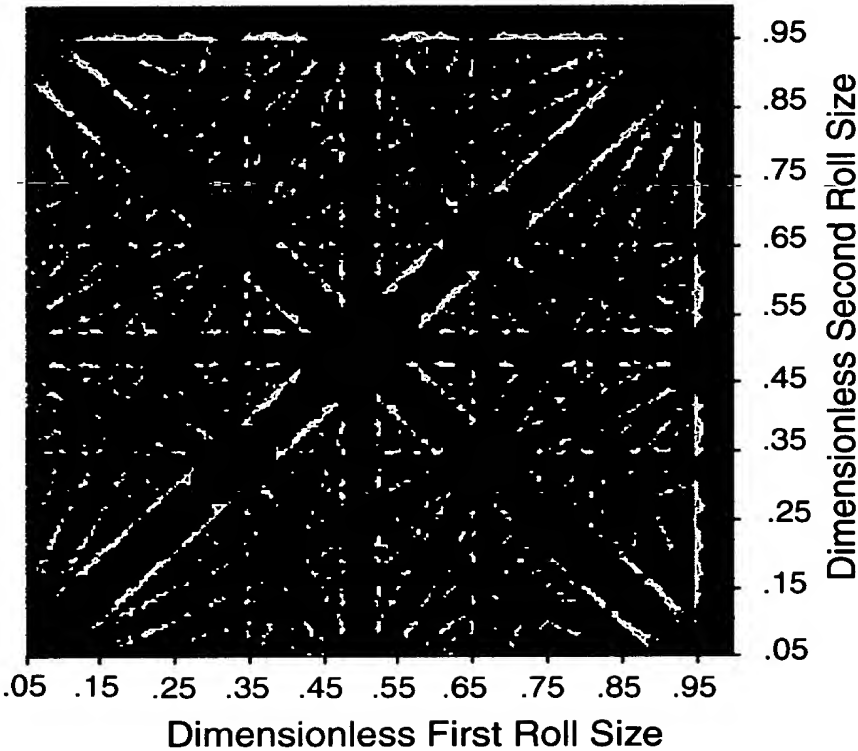


FIG. 24

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

COATING DEVICE AND METHOD

Willi Leonard, et al.

55476 2A.002

FOOT 0 " 556 25 260

Dim. Min.
Caliper

- 0.855-0.95
0.76-0.855
0.665-0.76
0.57-0.665
0.475-0.57
0.38-0.475
0.285-0.38
0.19-0.285
0.095-0.19
0-0.095

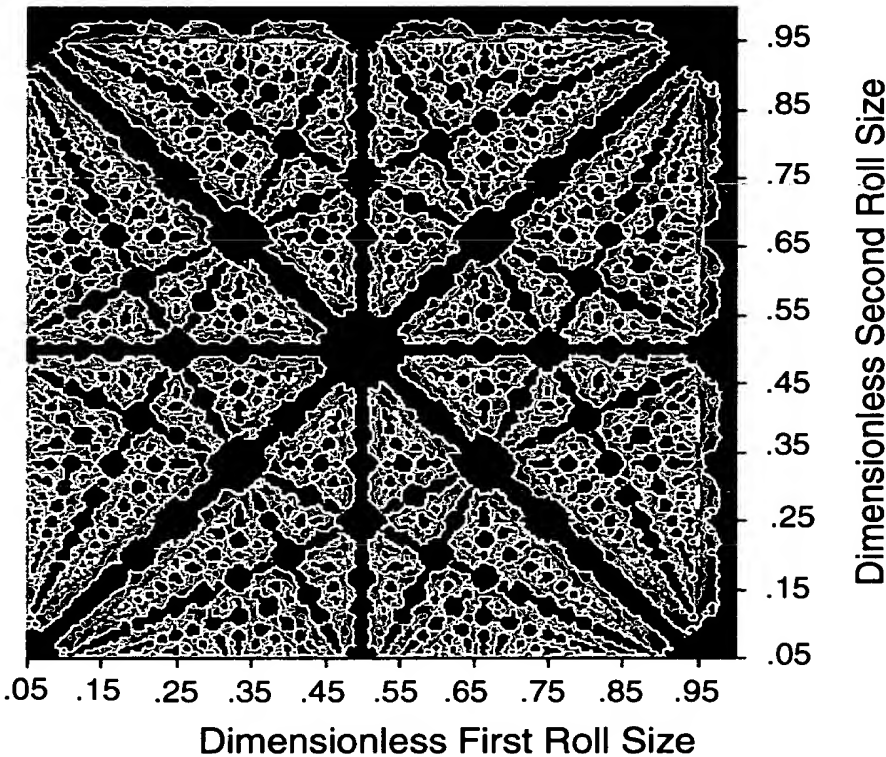


FIG. 25

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

COATING DEVICE AND METHOD
 William Leonard, et al.
 55476US 2A.002

FOOT 10" 55625260

Dim. Min.
 Caliper

- 0.558-0.62
- 0.496-0.558
- ▣ 0.434-0.496
- ▢ 0.372-0.434
- 0.31-0.372
- 0.248-0.31
- 0.186-0.248
- 0.124-0.186
- 0.062-0.124
- 0-0.062

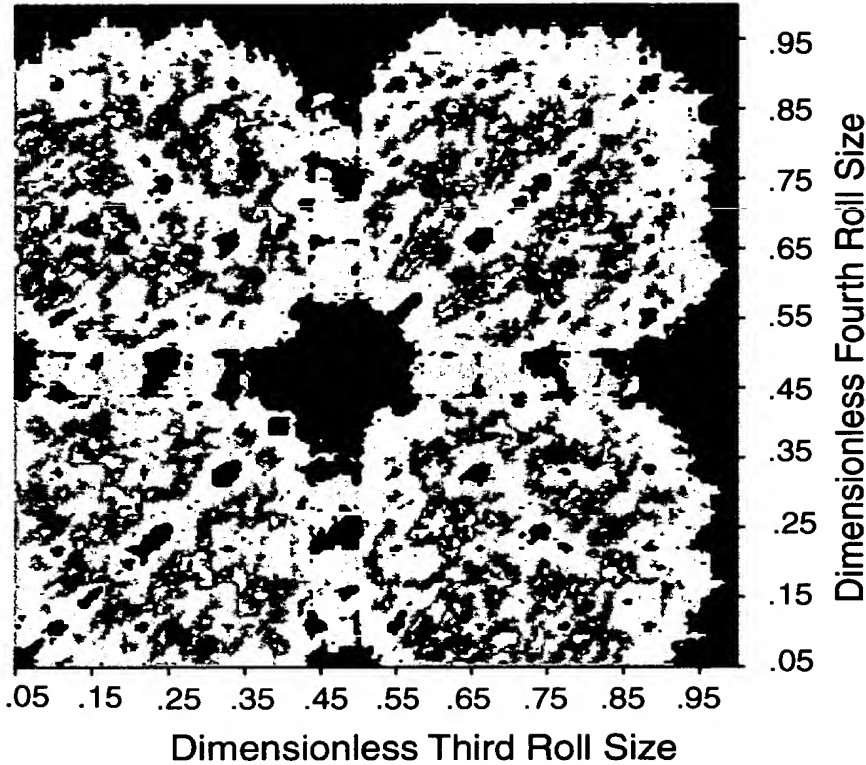


FIG. 26

20/20

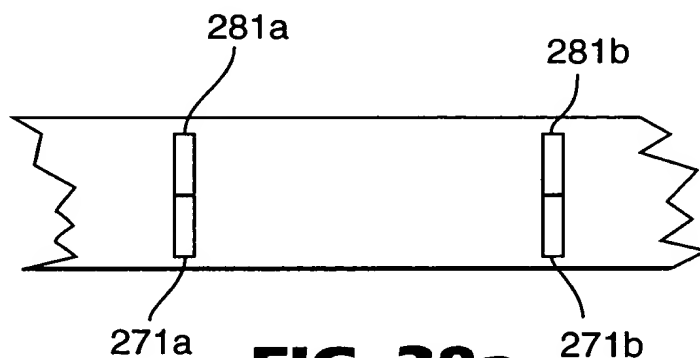


FIG. 28a

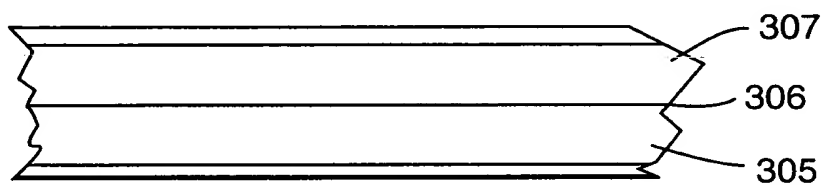


FIG. 28b

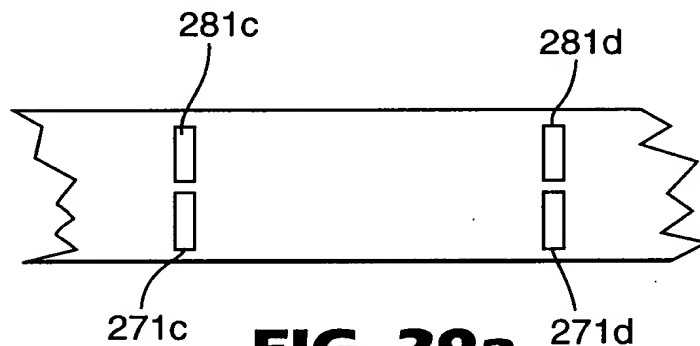


FIG. 29a

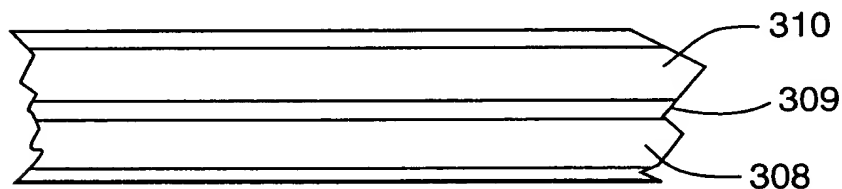


FIG. 29b

FIG. 28a